

# PRO-flex ACP 6003\_3

## Three Phase AC Current Probe

ACP6003\_3\_081003\_07



The new PRO-flex ACP 6003\_3 is a 3-Phase AC current Probe utilising the Rogowski principle. It can be used to measure currents up to 6000 Amps from very low frequencies to 10kHz.

The flexible and lightweight measuring head allows quick and easy installation in hard to reach areas and with large conductors.



### Electrical Characteristics

<b>Current Ranges</b>	60A / 600A / 6000A AC RMS (selectable via rotary switch)
<b>Output Sensitivity</b>	50mV / 5mV / 0.5mV per A (AC coupled)
<b>Accuracy (at 25°C)</b>	± 1% of reading ± 0.1A (60A range) ± 1% of reading ± 1A (600A / 6000A range)
<b>Load Impedance</b>	100kΩ minimum
<b>Linearity</b>	± 0.2% of reading (10% to 100% of range)
<b>Noise</b>	80mA (60A) / 400mA (600A / 6000A range)
<b>Bandwidth</b>	10Hz to 10kHz (-1dB)
<b>Phase Error</b>	± <1° (45 – 65Hz)
<b>Temperature Coefficient</b>	± 0.1% of reading / °C
<b>Position Sensitivity</b>	± 2% of reading
<b>External Field</b>	± 0.25% of range (with cable > 100mm from the head)
<b>Power Supply</b>	2 x AA MN 1500 LR6 Alkaline low battery indicator external power supply (3V / 100mA)
<b>Battery Life</b>	1000 hours
<b>Overload Indication</b>	Red LED ON indicates the range overload
<b>Working Voltage</b> (see Safety Standards section)	1000V AC RMS or DC (Probe and Integrator) 30V max (Output)

### General Characteristics

<b>Probe and Cable Material</b>	Alcryn 2070 NC LATENE 7H2W V0
<b>Probe Cable Length</b>	610mm (24") / 915mm (36") / 1220mm (48")
<b>Probe Cable Diameter</b>	9.9mm (nominal)
<b>Cable Length</b>	2m (Probe to Integrator box)
<b>Output</b>	0.5m long lead terminated with 3 X safety male BNC
<b>Operating Temperature Range</b>	-20 to +65°C
<b>Storage Temperature Range</b>	-40 to +75°C
<b>Operating Humidity</b>	15% to 85% (non condensing)
<b>Degree of protection</b>	IP65 Probe, IP40 Integrator module
<b>Colour</b>	RAL 120 70 75 Lemon green

# PRO-flex ACP 6003\_3

## Three Phase AC Current Probe

ACP6003\_3\_081003\_07



### Safety Standards

- EN 61010-1:2001
- EN 61010-031:2002
- EN 61010-2-032:2002
- UL 610101, 2nd Edition, 2005-07-22
- CAN/CSA-22.2 No. 61010-1, 2nd Edition, 2004-07

1000 VRMS, Category III, 600 VRMS, Category IV, Pollution Degree 2 (Probe and Integrator)

**Limitations** Use of the probe on uninsulated conductors is limited to 1000 V AC RMS or DC and frequencies below 1 kHz.


**Compliance** ROHS and WEEE

### Compatible Instruments

- Dranetz-BMI Power Monitors** PX5, PG4400, PV440, PP4300, PP1
- Fluke Power Monitors** Fluke 430 Series

### Ordering Information

Part No.	Model
P-02.762.1	ACP 6003_3/24
P-02.762.2	ACP 6003_3/36
P-02.762.3	ACP 6003_3/48

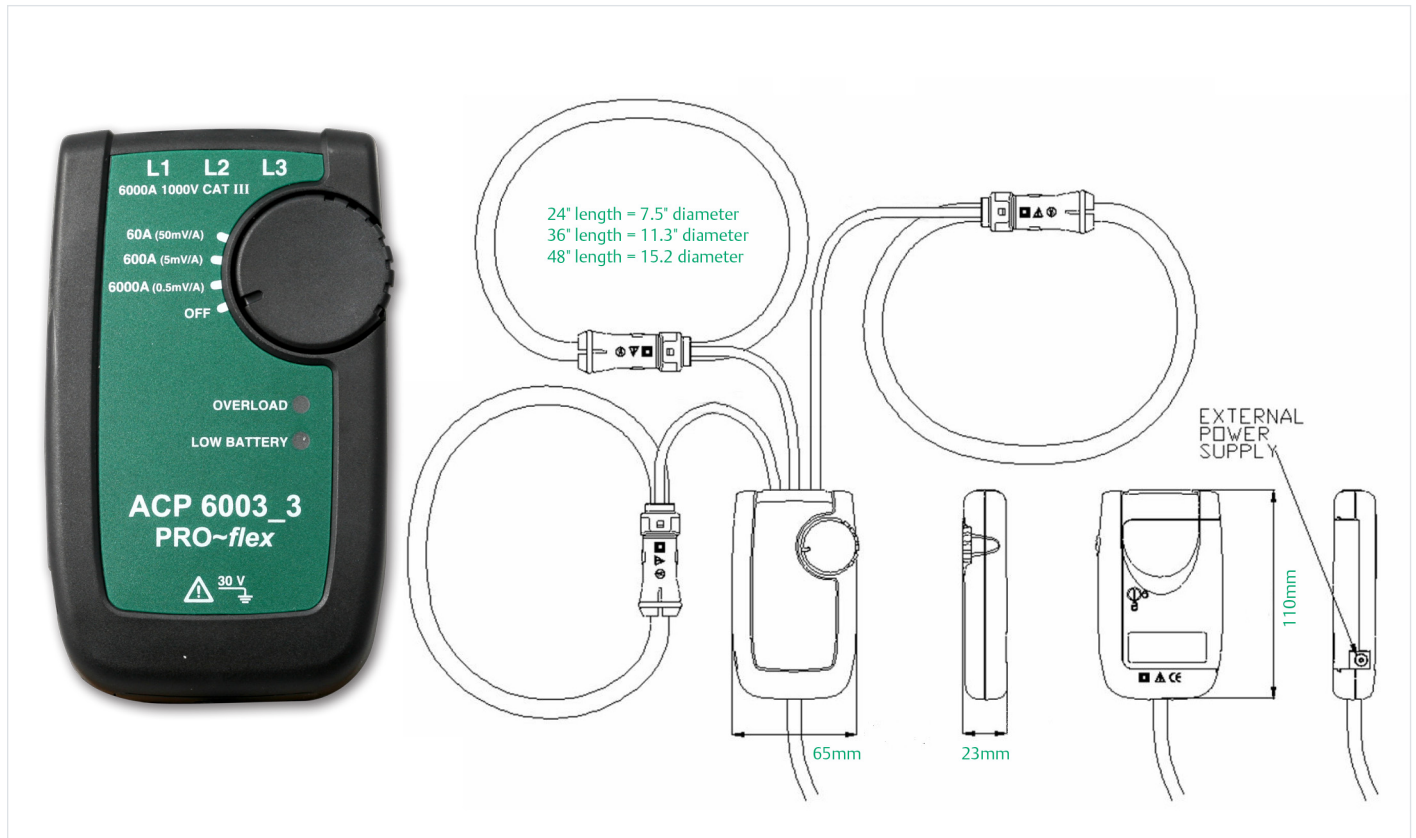

Exclusive GMC-I PROSYS Distributor of Americas

### PowerCET Corporation

3350 Scott Blvd., Bldg. 55, Unit 1, Santa Clara, CA 95054

tel: +1.408.988.1346 email: info@powercet.com

www.powercet.com/prosys